

Slim&sleek stainless steel touchscreen kiosk




Applications

- Internet browse
- Exhibition demonstration
- Information ads

Features

1. Industrial mini-ITX motherboard;
2. Waterproof IR/SAW touchscreen;
3. All stainless steel sleek enclosure

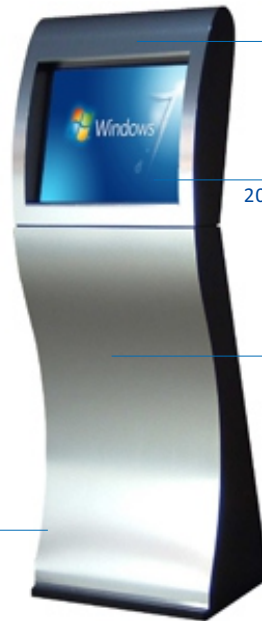

custom LOGO area

20/19/17/15 inch water-proof SAW touchscreen

Low noise fans with replaceable foam

High performance host computer

Stereo audio



Component/function layouts

Specifications

Model Name	S2B-17SE	S2SK-20SE
Processor	1.2GHz VIA® Nano™ E (fanless)	Intel® Core™Celeron 1037 CPU(fan)
RAM	2Gb DDR II(4G max)	8Gb DDR III(max)
HDD	60G SSD or 500G 7200rpm 3.5" hard driver Up to 3TB size	
Monitor	17" LCD with DX9 decoding acceleration	20" LCD with DX9 decoding acceleration
Touchscreen	Water proof IR/SAW touchscreen	
Audio	Bi-stereo channel 2X10W speakers	
Enclosure	Durable all stainless steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate with drawers Security lock with crossbars Moistureproof,Antirust,Anti-acid,Static free Dimensions: 45cm * 52cm * 163cm	
Rear I/O Connectors	Power Jack Fuse(3A) Main power switch Host PC Power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45	
Fans	110 or 220 V AC selective Operation noise level: <45dB	
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A	
Operating System	XP, WIN 7, WinCE, XPe, WES, Linux2.6, Ubuntu9, Fedora10	
Operating Temperature	0°C up to 50°C(need heater in below 0°C environment)	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	

