

Wall through touchscreen payment kiosk for bank management system with PIN pad, card reader, bill cash validator, invoice dot-matrix printer, receipt and list thermal printer



**Wallthrough
payment kiosk
AW31**

Applications

- Payment system
- Insurance selfservice
- Card payment
- Utility bill collection
- Information ads

Features

1. Powerful up-to-date CPU;
2. Waterproof IR/SAW touchscreen;
3. CUSTOM brand printer with original protection mouth;
4. MEI SCL83 large cash box cash validator;
5. Invoice dot-matrix printer;
6. Onboard VoIP system
7. All steel sleek anti graffiti enclosure

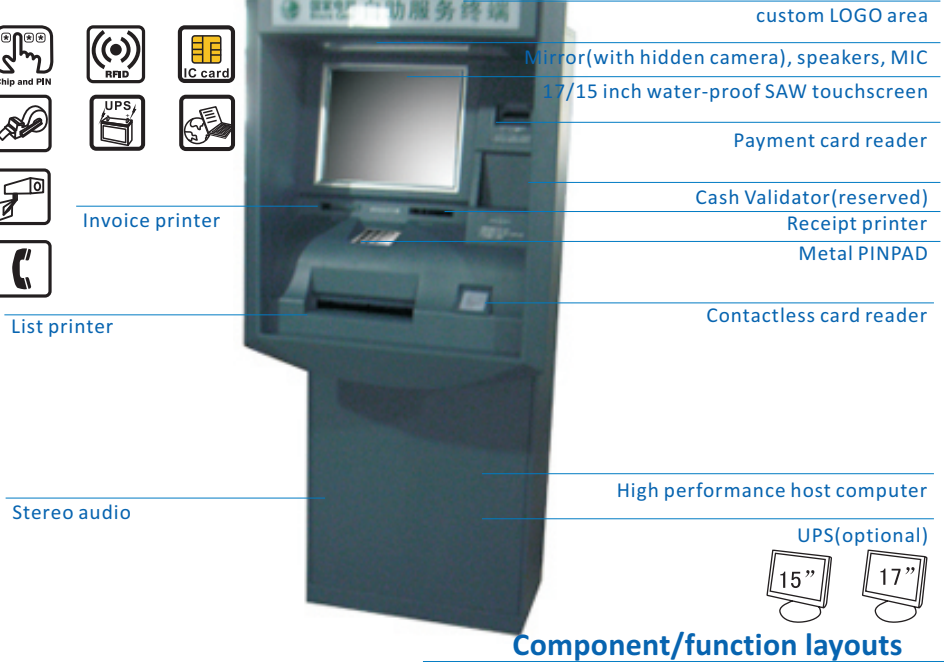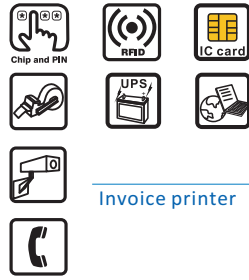

Specifications

Model Name	AW31E	AW31B
Processor	Intel® Core™ i3 2100T	3.0GHz Intel® Pentium™ E6600(fan)
RAM	4Gb DDR III(16G max)	2Gb DDR II(4G max)
HDD	60G SSD or 500G 7200rpm 3.5" hard driver Up to 3TB size	
Monitor	17" LCD with DX9 decoding acceleration	17" LCD with DX9 decoding acceleration
Touchscreen	Water proof IR/SAW touchscreen	
Contactless card reader	ISO144443 Type A&B	ISO144443 Type A
Receipt printer	CUSTOM®(Italy brand) TG2480 thermal printer, thickness:80-120g/m2(optional)	
Payment card reader	Motorized CRT310 IC, magnetic and RFID card reader	
Dot-matrix invoice printer	(None)	Star 9pin stylus impact printer MP912
Metal PINPAD	MKP2920	
VoIP	RCA via PC mic and line-out	
Cash validator	MEI SLC83 bill validator with 1200 notes cashbox	
UPS	SANTAK K1000 PRO UPS for at least 5 mins of power	
Audio	Bi-stereo channel 2X10W speakers	
Enclosure	Durable all-steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate with drawers Safe with security lock and handle Moistureproof,Antirust,Anti-acid,Static free Dimensions: 90-112cm *80-96cm * 192-200cm	
Rear I/O Connectors	Power Jack Fuse(3A) Main power switch Host PC Power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45	
Fans	110 or 220 V AC selective Operation noise level: <45dB	
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A	
Operating System	XP, WIN 7,XPe, WES	
Operating Temperature	0°C up to 45°C(need heater in below 0°C environment)	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	

