


Touchscreen internet bank queue kiosk with thermal printer

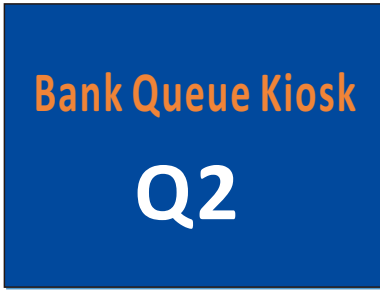

Applications

- Queue management
- Receipt printing
- Telecom bill collection
- Information ads

Features

1. Mobile CPU system(Mobile on Desktop - MoDT) technology;
2. Waterproof IR/SAW touchscreen;
3. High speed printer with original printer head;
4. optional card reader
5. All steel sleek anti graffiti enclosure



15/17/15 inch water-proof CA/IR/SAW touchscreen

CUSTOM TG2480 thermal printer

Stereo audio

Anti-static surface

Low noise fans with replaceable foam

Fanless MoDT host computer



Component/function layouts

Specifications

Model Name	Q2-17M-TG2480	Q2-15E
Processor	Intel Pentium G3430/20T	Intel ATOM D2550
RAM	2Gb DDR II(max)	
HDD	60G SSD or 500G 7200rpm 3.5" hard driver Up to 3TB size	
Monitor	17" LCD with DX9 decoding acceleration	15" LCD with DX9 decoding acceleration
Touchscreen	Water proof capacitive IR or SAW touchscreen	
RFID reader	(optional)	
Ticket printer	CUSTOM TG2480 thermal printer, thickness:80-110g/m2	
Credit/Debit card R'	(optional)	
Audio	Bi-stereo channel 2X10W speakers	
Enclosure	Durable all-steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate with drawers Security lock with crossbars Moistureproof,Antirust,Anti-acid,Static free Dimensions: 43-50cm*52-60cm*152-165cm(varable as per monitor and configurations)	
Rear I/O Connectors	Power Jack Fuse(3A) Power switch Host power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45	
Fans	110 or 220 V AC selective Operation noise level: <45dB	
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A	
Operating System	XP, WIN 7, WinCE, XPe, WES, Linux2.6, Ubuntu9, Fedora10	
Operating Temperature	0°C up to 50°C(need heater in below 0°C environment)	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	

